




## Trójnik kielichowy do rur PVC

**MMB-KS (seria 4075)**

**LEYA (BELGICAST)**

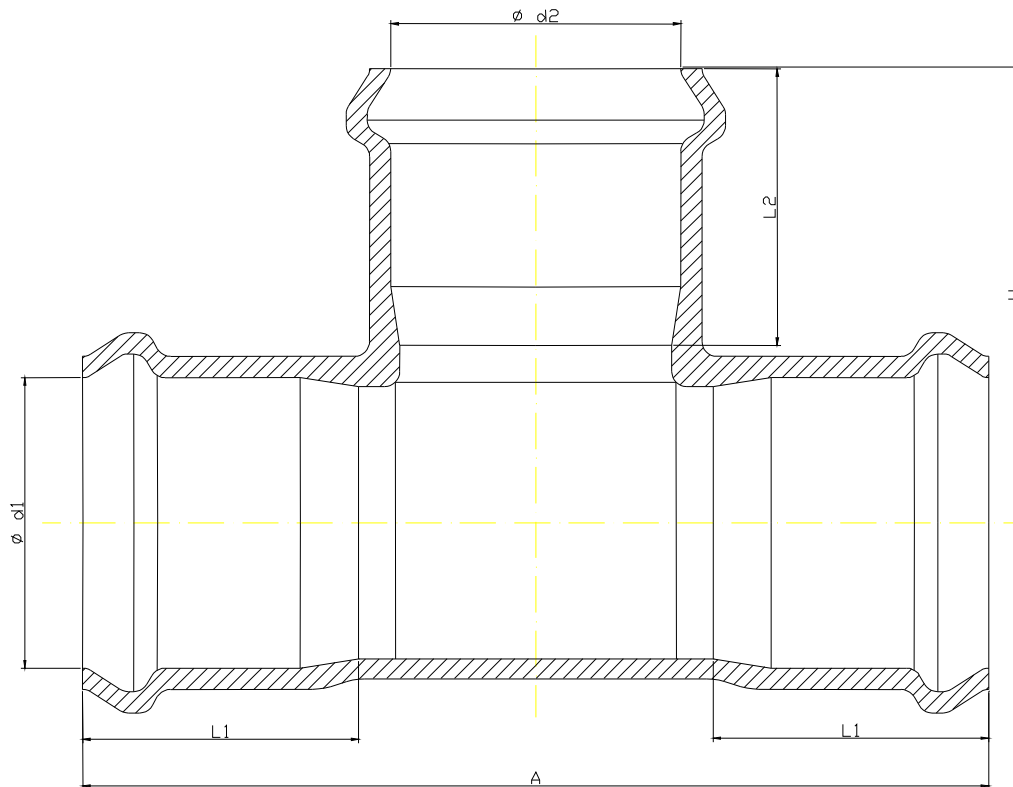

Element	Materiał	Pokrycie
Korpus	Żeliwo sferoidalne GGG 50	Epoksydowany (250 $\mu$ m)
Uszczelka	EPDM	



Nr katalogowy	Ø d1	Ø d2	A	L1	H	L2	Masa
4076	63	50	245	95	125	90	4
4076-A	63	63	255	95	125	95	4,3
4077	75	63	275	100	135	95	5
4077-A	75	75	291	100	143	100	5,6
4078	90	63	275	105	145	95	6
4078-A	90	75	290	105	150	100	6,5
4078-B	90	90	308	105	155	105	7,2
4079	110	63	300	115	155	95	7,8
4079-A	110	75	315	115	165	100	8,2
4079-B	110	90	328	115	165	105	8,7
4079-C	110	110	345	115	175	115	9,7
4080	125	63	340	125	155	95	9
4080-A	125	75	345	125	163	100	9,5
4080-B	125	90	360	125	165	105	10,2
4080-C	125	110	375	125	175	115	10,8
4080-D	125	125	393	125	190	125	11,8
4081	140	63	325	130	170	95	9,7
4081-A	140	75	335	130	175	100	10,4
4081-B	140	90	350	130	180	105	11
4081-C	140	110	370	130	185	115	11,8
4081-D	140	125	370	130	205	125	12,7
4081-E	140	140	390	130	200	130	13,3
4082	160	63	350	145	180	95	11,8
4082-A	160	75	365	145	190	100	12,7
4082-B	160	90	380	145	190	105	13,4
4082-C	160	110	400	145	200	115	14,5
4082-D	160	125	415	145	210	125	15,3
4082-E	160	140	425	145	210	130	16
4082-F	160	160	446	145	225	145	17,6
4083	180	110	440	155	210	115	17,2
4083-A	180	140	465	155	210	130	19
4083-B	180	160	480	155	230	145	20,4
4083-C	180	180	500	155	250	155	21
4084	200	75	390	155	210	100	16
4084-A	200	90	410	155	210	105	17,2
4084-B	200	110	430	155	220	115	18,5
4084-C	200	125	440	155	230	125	19,5
4084-D	200	140	455	155	230	130	20,3
4084-E	200	160	480	155	245	145	22
4084-F	200	180	510	155	260	155	23,5
4084-G	200	200	520	155	260	155	25
4085	225	90	410	155	215	105	19
4085-A	225	110	430	155	230	115	20,5
4085-B	225	125	450	155	245	125	21,5
4085-C	225	140	455	155	240	130	22,3
4085-D	225	160	480	155	255	145	24
4085-E	225	180	490	155	275	155	25,5
4085-F	225	200	520	155	270	155	27,3
4085-G	225	225	540	155	270	155	28



Nr katalogowy	Ø d1	Ø d2	A	L1	H	L2	Masa
4086	250	90	450	175	235	105	26
4086-A	250	110	470	175	245	115	28,5
4086-B	250	140	510	175	260	130	30,8
4086-C	250	160	520	175	270	145	33
4086-D	250	200	560	175	285	155	34,5
4086-E	250	250	605	175	305	175	39,5
4087	280	90	490	185	250	105	31,5
4087-A	280	110	510	185	260	115	33
4087-B	280	160	560	185	285	145	37
4087-C	280	200	610	185	300	155	39,2
4087-D	280	225	620	185	300	155	41,5
4087-E	280	250	655	185	320	175	43,2
4087-F	280	280	675	185	340	185	47,5
4088	315	90	480	190	265	105	29,6
4088-A	315	110	500	190	275	115	32,5
4088-B	315	140	540	190	290	130	38,6
4088-C	315	160	550	190	300	145	42,2
4088-D	315	200	610	190	330	155	47,3
4088-E	315	225	610	190	315	155	48,7
4088-F	315	250	640	190	355	175	50,2
4088-G	315	280	665	190	355	185	51,7
4088-H	315	315	700	190	350	190	58,4
4089	355	110	570	205	290	115	44,8
4089-A	355	160	600	205	315	145	49
4089-B	355	200	630	205	340	155	53,5
4089-C	355	315	740	205	385	190	63,7
4089-D	355	355	780	205	390	205	68,3
4090	400	200	680	230	370	155	64,5
4090-A	400	315	790	230	410	190	76
490-B	400	400	880	230	440	230	87