





Kołnierze redukcyjne (ELINA)

Kołnierze umożliwiają połączenie armatury o różnych średnicach nominalnych i owierceniach.

Kołnierze redukcyjne typ A

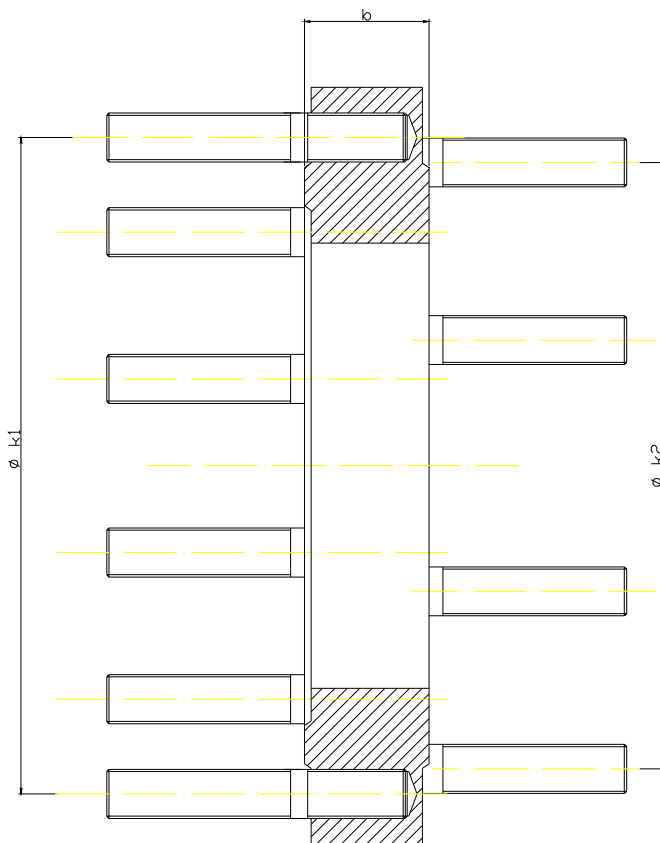

Kołnierze redukcyjne typ B

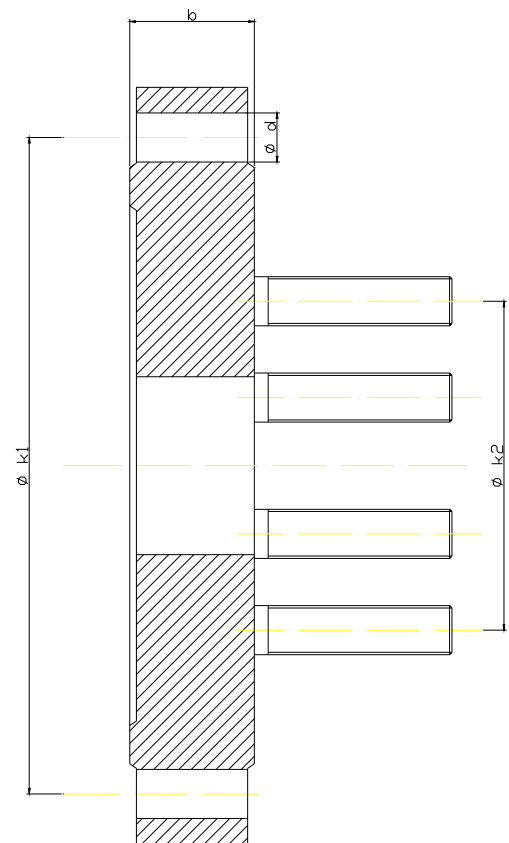



Wymiary

DN	Typ	b	Owiercenie I				K2			Masa
			K1	Il. śrub	Wymiar	d	K2	Il. śrub	Wymiar	
50/40	A	45	125	4	M16X50		110	4	M16X50	5,1
65/40	A	45	145	4	M16X50		110	4	M16X50	5,7
65/50	A	45	145	4	M16X50		125	4	M16X50	5,6
80/50	A	28	160	8	M16X50		125	4	M16X50	5,6
80/65	A	28	160	8	M16X50		145	4	M16X50	5,4
80/80	A	28	160	8	M16X50		160	4	M16X50	5,2
100/50	A	27	180	8	M16X50		125	4	M16X50	6,3
100/65	A	30	180	8	M16X50		145	4	M16X50	6,5
100/80	A	30	180	8	M16X50		160	8	M16X50	6,9
100/100	A	30/47	180	8	M16X50		180	8	M16X50	8,3
125/50	A	30	210	8	M16X50		125	4	M16X50	8,2
125/65	A	30	210	8	M16X50		145	4	M16X50	8,1
125/80	A	30	210	8	M16X50		160	8	M16X50	8,0
125/100	A	30	210	8	M16X50		180	8	M16X50	7,6
125/125	A	30/47	210	8	M16X50		210	8	M16X50	9,5
150/50	B	30	240	8		23	125	4	M16X50	11,0
150/65	B	30	240	8		23	145	4	M16X50	10,8
150/80	B	30	240	8		23	160	8	M16X50	10,7
150/100	A	30	240	8	M20X60		180	8	M16X50	9,7
150/125	A	30	240	8	M20X60		210	8	M16X50	11,2
150/150	A	30/47	240	8	M20X60		240	8	M20X60	13,5
200/80	B	30	295	8		23	160	8	M16X50	14,7
200/100	B	30	295	8		23	180	8	M16X50	14,5
200/125	B	30	295	8		23	210	8	M16X50	13,7
200/150	A	30	295	8	M20x60		240	8	M20x60	13,5
200/200	A	32/48	295	12	M20X60		295	8	M20X60	16,5
225/200	A	45	325	12	M20X60		295	8	M20X60	19,0
250/80	B	31	350	12		23	160	8	M16X50	22,1
250/100	B	31	350	12		23	180	8	M16X50	21,9
250/125	B	31	350	12		23	210	8	M16X50	21,5
250/150	B	31	350	12		23	240	8	M20X60	20,0
250/200	A	32	350	12	M20X60		295	8	M20X60	21,3
250/225	A	48	350	12	M20X60		325	8	M20X60	20,8
250/250	A	32/50	355	12	M20X60		350	12	M20X60	25,0
300/80	B	31	400	12		23	160	8	M16X50	27,5
300/100	B	31	400	12		23	180	8	M16X50	27,1
300/125	B	31	400	12		23	210	8	M16X50	26,9
300/150	B	31	400	12		23	240	8	M20X60	26,0
300/200	B	32	400	12		23	295	8	M20X60	24,8
300/250	A	33	400	12	M20X60		350	12	M20X60	22,6
300/300	A	32/55	410	12	M24X70		400	12	M20X60	36,0
500/450	A	75	620	20	M24x70		565	20	M24x70	110,0
600/500	A	60	725	20	M27x80		620	20	M24x70	120,0

Uwaga: wymiary dotyczą kołnierzy na PN 10, a zapisane kursywą i wytłuszczone dotyczą kołnierzy z różną liczbą śrub po obu stronach lub kołnierzy PN16/PN 10. Na życzenie możliwe jest inne wykonanie.